




**SHG ULTRA
LOW PROFILE
TROLLEY HOIST
0.5t~20t**

**SHGA ADJUSTABLE
LOW PROFILE
TROLLEY HOIST
1t~10t**



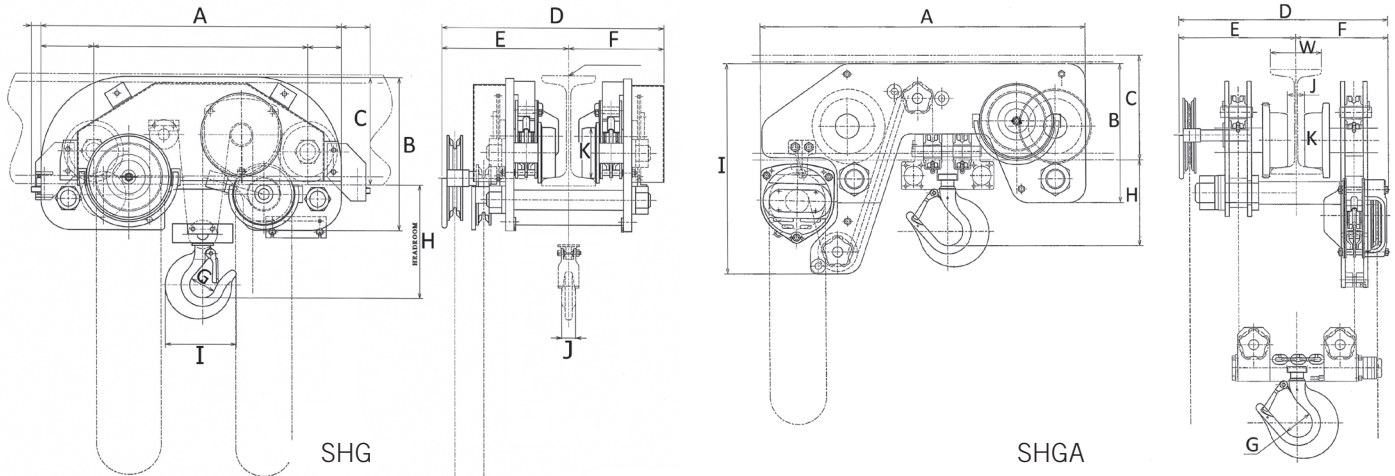

SPECIFICATIONS - SHG & SHGA LOW PROFILE TROLLEY HOIST

Model	Capacity (metric ton)	Test load (metric ton)	Standard Lift (ft)	Dia. of Load Chain (mm) X Falls	Hand Effort to Lift (lbf)	Hand Effort to Traverse (lbf)	Headroom Dim. H (in)	I Beam Width Dim. W (in)
SHG-0.5	0.5	750kg	8	5x4	55	11	5.15	Manufactured to Specification
SHG-1	1	1.5	8	5x4	62	11	6.10	
SHG-1.6	1.6	2.4	8	5x4	84	9	7.08	
SHG-2	2	3	10	7.1x2	82	12	7.08	
SHG-3.1	3.15	4.8	10	7.1x4	84	18	7.91	
SHG-5	5	7.5	10	7.1x4	84	25	8.85	
SHG-10	10	12.5	10	9x4	88	60	10.23	
SHG-10B	10	12.5	10	9x4	88	60	11.40	
SHG-20	20	25	10	9x8	110	88	15.75	
SHGA-1	1	1.25	10	5.0x2	62	11	4.50	
SHGA-2	2	2.5	10	7.1x2	82	12	5.70	3.9 to 5.9
SHGA-3.1	3.1	4	10	7.1x2	84	18	6.30	4.9 to 6.8
SHGA-5	5	6.3	10	9.0x2	84	25	7.70	4.9 to 6.8
SHGA-10	10	12.5	10	9.0x4	88	60	9.90	5.9 to 7.4

DIMENSIONS (IN.) - SHG & SHGA LOW PROFILE TROLLEY HOIST

Model	A	B	C	D	E	F	G	I	J	K	Unit Weight (lbs) with 10' Lift
SHG-0.5	26.8	11.0	7.0	19.6	11.4	8.2	1.6	7.2	0.5	3.2	132
SHG-1	26.8	11.0	7.0	19.6	11.4	8.2	1.9	3.9	0.7	3.2	135
SHG-1.6	26.8	11.0	7.1	19.6	11.4	8.2	2.6	5.4	1.0	3.9	154
SHG-2	26.8	11.0	7.1	19.6	11.4	8.2	2.6	5.4	1.0	3.9	154
SHG-3.1	30.5	13.7	8.9	20.3	11.6	8.7	2.4	6.5	1.2	4.5	331
SHG-5	32.7	13.7	8.9	21.5	12.0	9.4	2.8	6.1	1.4	4.9	551
SHG-10	36.9	16.5	11.0	22.6	12.7	9.9	3.3	9.0	1.8	6.2	772
SHG-20	45.2	19.6	13.1	24.2	13.5	10.7	4.4	12.1	2.7	7.8	1874
SHGA-1	20.5	7.9	5.9	E+F	8.7 - 9.7	7.2-8.1	1.7	12.6	1.3-3.3	3.1	135
SHGA-2	25.6	9.8	7.9	E+F	9.02-10.2	8.0-9.0	2.1	15.7	1.8-3.8	3.9	154
SHGA-3.1	27.6	11.0	9.8	E+F	10.1-11.1	9.0-10.1	2.4	17.7	2.6-4.6	4.5	331
SHGA-5	33.9	13.8	9.8	E+F	12.75-13.75	10.9-11.9	2.8	22.4	1.8-3.8	4.9	551
SHGA-10	37.6	15.7	11.8	E+F	13.5-14.7	10.7-11.5	3.3	24.0	2.0-3.5	6.2	771

